

Porcelain gres cutting and processing

DISTAR Be perfect

DISTAR

Arc 10 - 2015 820245 - 281387 125 mm Prfect amic tile,

No.

STAR

distar.tools

DISTAR Clean	cutting Ø 115-125		Fast cu	Itting Ø 115-12
	Perfect			Gres Master
	Edge quality	Speed	DiSTAR	Edge quality ● ● ● ● ○
	Wet cutting quality in dry cu Rigid and stable.	utting mode.		Fast cutting of 20 mm hand-held tile cutters
	Scalpel			Multigres
	••••+	••••	DISTAR 900 800	•••00
	Fine ultra-thin cutting of ceramics without chipping.			Fast precutting for tri installation.
DISTAR	Elegant Ø 100			Decor Slim
	••••++	• • • 0 0	O O O O	••••
	Porcelain furniture product Mosaic and glass cutting.	ion.		Optimal speed and q



MasterCUT

Ersatile, high-speed, finish cutting of glazed tiles, mosaics, glass.



Esthete 2.0/Esthete

Speed

....

Edge quality • • • / Works well with corded and

cordless angle grinders.

AirSlider 90 Dust removal with customizable depth.





Jolly cutting

25

Speed m thick material with

trim and molding

....

....

quality ratio.



Special application

Cleaner Ø 101,6

Speed

Tile grout cutting. Thickness 0,8 mm.

LevelCUT Ø 60

• • • • •

For glue undercutting.

FireFly luminate work surface.

comfortable cutting.

ProGres

Edge quality

cutting.







Egde Dry

Edge quality Speed

Hard porcelain gres cutting, clean straight and miter cutting.









Slider 45 PRO

Professional miter cutting of medium and large tile formats.

Duster 115-125

n

Dust-free cutting at any angle. Reduces hand strain.

Comfortable cutting at 45 degrees.





Manual grinding of porcelain stoneware. Available in three grit sizes. #1, #2, #3

Highly productive grinding. Two grit sizes: 60, 100.

Dust extraction system for PORCELAIN grinding.







Transportation systems

PowerFIX WHITE

PowerFIX AUTO



Automatic vacuum suction cup with pressure support, a replaceable battery, and white non-marking rubber.

PowerFIX VIBRO

Vibration suction cup for laying tiles up to 30 kg, featuring 6 vibration modes. Suitable for textured surfaces, made with safe silicone.

TileRepairKit

A kit for repairing cracks, scratches and chips on tiles.





Vacuum suction cup with a capacity of up to 110 kg, equipped with a manometer and white non-marking rubber. Suitable for tiles, glass, and MDF.

PowerFIX AUTO 150



Automatic vacuum suction cup for tiles. Advantages: compact diameter, ideal for small-sized tiles.



For laying small tiles and precise drilling. Included: 50 mm and 80 mm suction cups, a metal drilling template for holes with diameters from 6 to 70 mm.

Distar BOX

Case for protecting and storing diamond tools. Made of durable Oxford fabric, features an organizer, dimensions 35x30x15 cm, and a load capacity of up to 10 kg.





STAR

DISTAR

2025





Diamond tools for builders, electricians, plumbers

distar.tools

DISTAR

DISTAR Dry drill bits for microshock drilling Ø 32-300 mm (dry mode) RS-TX 🧏 🛔 RM-ТХ 🧯 🖍 Lifetime Speed Speed Lifetime L450 mm L450 mm Hard, unreinforced and Universal application. lightly reinforced concretes. XXX MICROSHOCK -300 mm XXX MICROSHOCK L300 mm 0 DISTAR DISTAR MATX // DISTAR DISTAR AM-TX AS-TX DIAFIX 11/4 UNC 11/4 UNC **DrillSTREAM** Dust extraction through M18 the drill shaft. 11/4 UNC 11/4 11/4 UNC UNC 11/4 11/4 Centrator* **Centrator Spring*** UNC UNC Easy and fast Easy and fast centering, and start of drilling. start of drilling. Spring-loaded centralizer. 0,5 kg Ø 42-122 mm Lightweight Ø 132-162 mm Ø 32-200 mm aluminum dust extraction. * for drill bits RM-TX, RS-TX, Concrete-X **Aluminum extensions** 16 🕝 Concrete-X Extender 11/4 UNC For a variety of light materials: concrete, brick, foam concrete. Aluminum lightweight extensions. Speed Lifetime 200 mm DISTAR 300 mm M16 Concrete-X 500 mm Dry socket drills Ø 68, 72, 82 mm (dry mode) CS-X 🥬 🕾 16 1 16 💏 **Krone PRO** RS-X **T-Concrete** S -**S** Lifetime Lifetime Lifetime Speed Speed Speed Speed Lifetime For brick, For concrete and For concrete and brick, For highly brick. Quick change also with microshock. price oriented. reinforced concrete. of magnetic adapter. XXX MICROSHOCK XXX MICROSHOCK DIAFIX

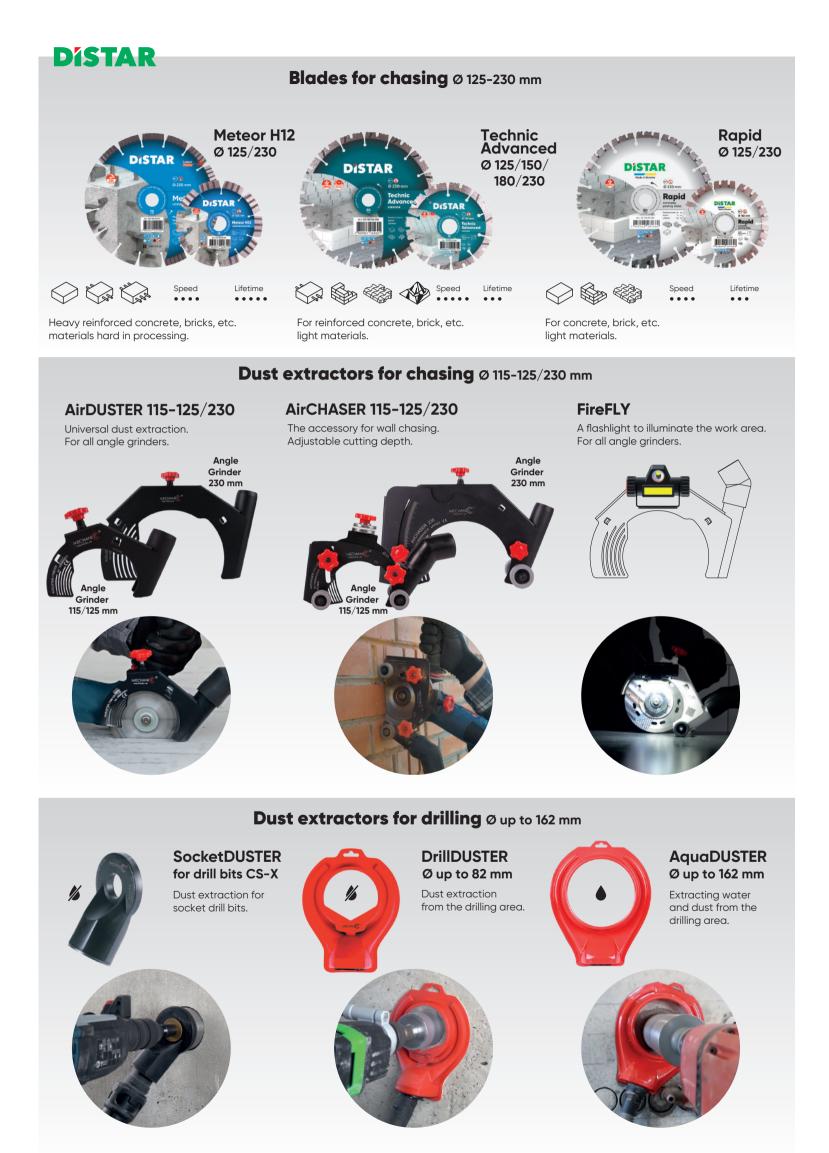

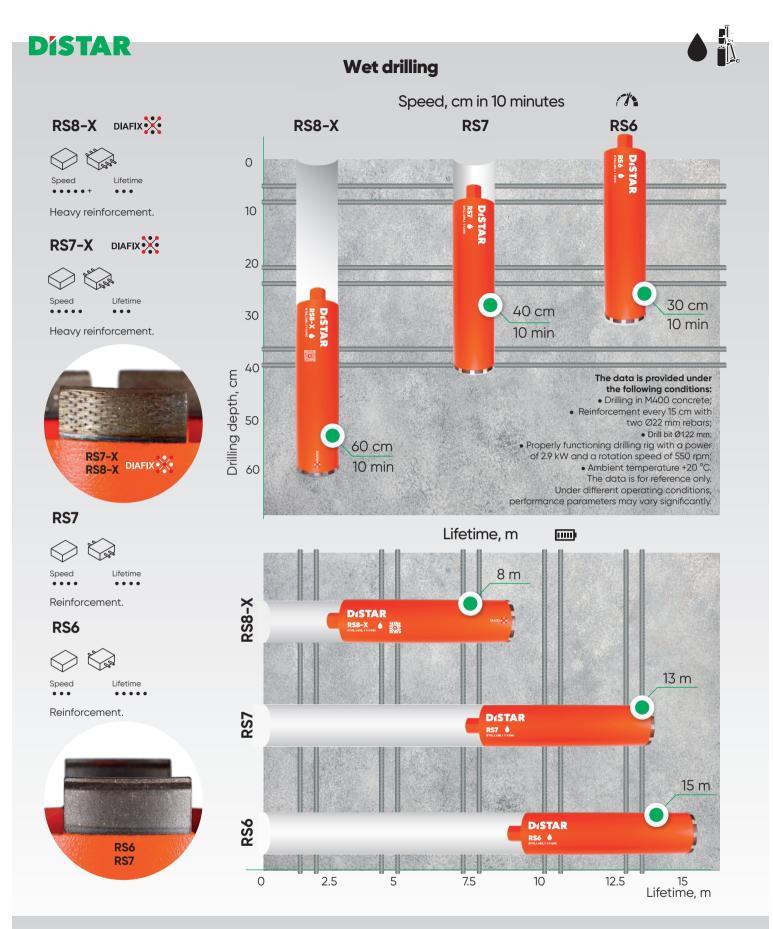

Steel extensions

Extension 1/2 GAS

200 mm 300 mm 500 mm



Extension 11/4 UNC

200 mm 300 mm 500 mm

